


**Cable H07ZZ-F** for connecting power tools, electric machines, medium-sized machines and equipment. Suitable for wet indoor, outdoor, commercial, agricultural and architectural applications. It can also be fixed on the wall of temporary buildings and directly installed on the lifting equipment and other machines.

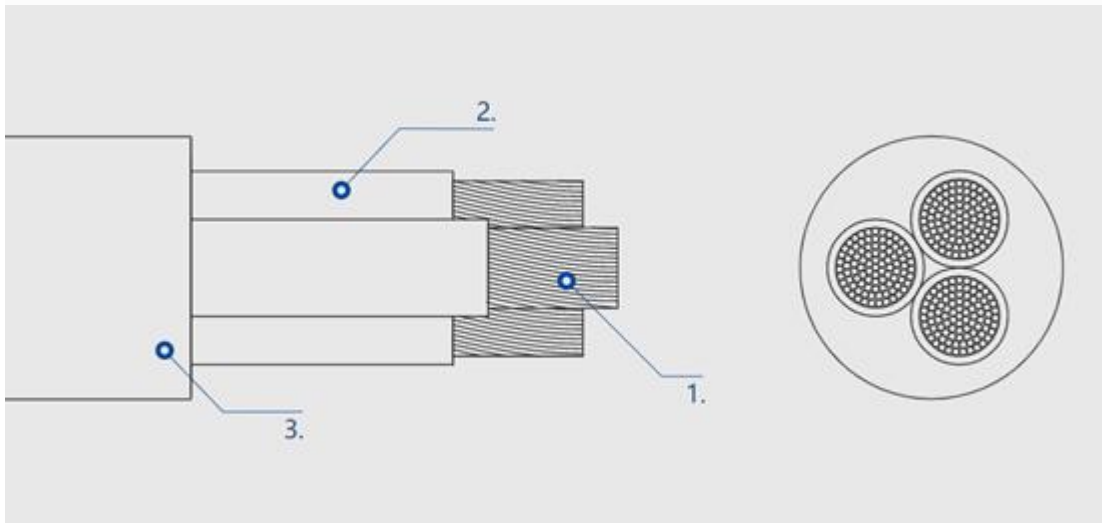

**Cable H07ZZ-F Technical requirement**

- 1The working temperature is + 90 °C;
- 2The rated voltage is 450 / 750V;
- 3The cable has weather resistance and certain oil resistance, which is suitable for outdoor or oil contact occasions.

**Cable H07ZZ-F Product name**

model	name
H07ZZ-F	H07zz-f low smoke halogen free rubber cable

**Cable H07ZZ-F Model and specification**

model	Rated voltage	Number of cores	section
H07ZZ-F	450/750V	1 ~ 5 cores	1.5~400mm <sup>2</sup>
		6 ~ 36 cores	1.5~4mm <sup>2</sup>

**Cable H07ZZ-F** is suitable for outdoor, but it needs to be fixed in a reasonable temperature range. Core digital identification allows users to peel off a very short outer sheath to clearly identify. Special black low smoke halogen-free outer sheath can resist ultraviolet radiation. [rubber cable](#) are not allowed to be directly immersed in water or buried underground.